




6340 Sky Creek Drive
Sacramento, California 95828 USA

Telephone (916) 383-1177
Fax (916) 383-1182

Removing center conductor from boom arm (for deicer replacement):

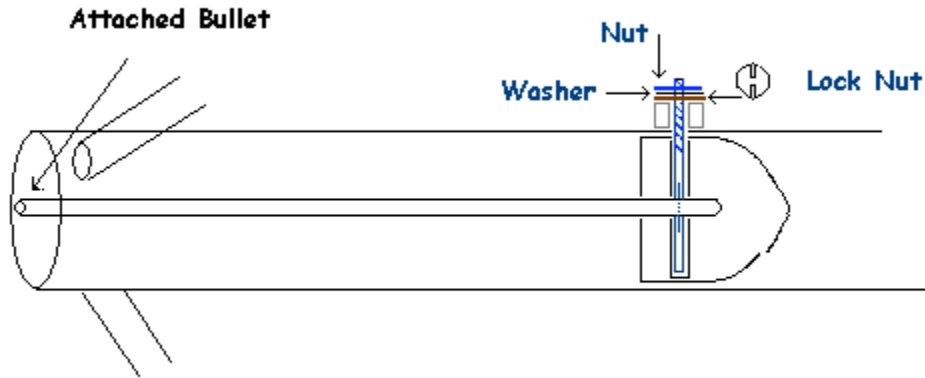

Remove Nut, Washer and Lock Nut. Pull threaded connector up. Then pull the center conductor out of boom arm (from feed line end of tube, other end is sealed). When replacing, shine a light into hole to line up center conductor to accept the threaded rod. Re-assemble in reverse of dis-assembly.