




UHF RCCS

UHF STARPOINT COMBINER

The JAMPRO UHF RCCS Low & Medium Power Starpoint combiners are designed to provide multi-channel combining at an affordable price. These combiners can accommodate two, three or four NTSC or PAL channels. The RCCS is composed of multiple band pass filters joined by precisely phased rigid line. The spacing of the channels determines the filter order employed.

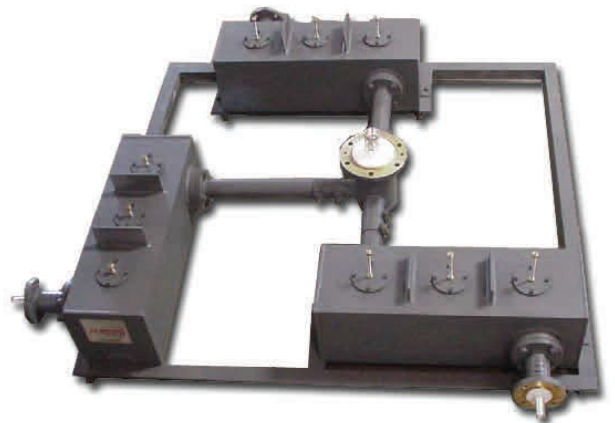

*Layout subject to change

LOW POWER—TYPICAL SPECIFICATIONS

NUMBER OF CHANNELS	2, 3, or 4
VSWR	< 1.08:1
INSERTION LOSS	< .25dB
ISOLATION	> 35dB
POWER LEVEL	250 watts per Channel
INPUT CONNECTORS	Type "N", DIN 7-16, 7/8" EIA
OUTPUT CONNECTOR	DIN 7-16, 7/8" EIA

MEDIUM POWER—TYPICAL SPECIFICATIONS

NUMBER OF CHANNELS	2, 3, or 4
VSWR	< 1.08:1
INSERTION LOSS	< .25dB
ISOLATION	> 35dB
POWER LEVEL	5 kW per Channel
INPUT CONNECTORS	1-5/8" EIA
OUTPUT CONNECTOR	1-5/8" or 3-1/8" EIA

*Specifications are typical and subject to change without notice